

OPEN-END RUBBER SYNCHRONOUS BELTS



OPEN-END RUBBER SYNCHRONOUS BELTS




OPEN-END RUBBER SYNCHRONOUS BELTS

Specially suitable for linear drives, accurate positioning and reversal drives.


A high load capacity, no maintenance cost and very low noise level, make this belt a perfect alternative to chain or cable reverse drives.

Megadyne Open-end rubber belts, produced both in straight and spiral cut, are available in the following profiles, pitches and constructions:


- ISORAN®: MXL; XL; L; H
- ISORAN® RPP: RPP3; RPP5; RPP8
- ISORAN® RPP SILVER: SLV5; SLV8
- STD: STD8

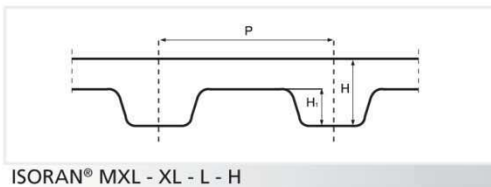

	MXL	XL	L	H
	Std. width (inches)			
	0,25	0,25	0,50	0,50
	0,31	0,31	0,75	0,75
	0,37	0,37	1,00	1,00
				1,50
				2,00
				3,00
P	2,032	P 5,08	P 9,525	P 12,7
H	1,14	H 2,4	H 3,6	H 4,4
H ₁	0,51	H ₁ 1,27	H ₁ 1,91	H ₁ 2,29

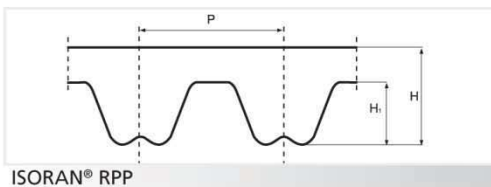

	RPP3	RPP5	RPP8
	Std. width (mm)		
	9	9	10
	12	12	15
	15	15	20
		20	25
		25	30
		30	50
			85
P	3	P 5	P 8
H	2,4	H 3,8	H 5,4
H ₁	1,15	H ₁ 2	H ₁ 3,2

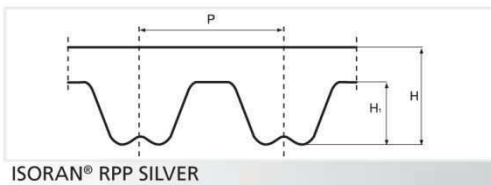

	SLV5	SLV8	STD8 M
	Std. width (mm)		
	15	10	10
	25	15	20
	30	20	30
		30	50
		50	85
		85	
P	5	P 8	P 8
H	3,8	H 5,4	H 5,3
H ₁	2	H ₁ 3,2	H ₁ 3,05

